


- \* DECKING MATERIAL TO BE SYNTHETIC TREX INSTALLED WITH STAINLESS STEEL SCREWS
- \* ROOF TO BE GALVALUME WITH 12" OVERHANG
- \* PILINGS CONNECTED TO ROOF STRUCTURE TO HAVE ACCENT LIGHTS
- \* POWER OUTLETS (4 TOTAL) AND WATER FAUCETS (3 TOTAL) TO BE INSTALLED (LOCATION TO BE DENOTED BY OWNER)
- \* UNDERWATER GREEN FISHING LIGHTS TO BE INSTALLED EAST OF DOCK

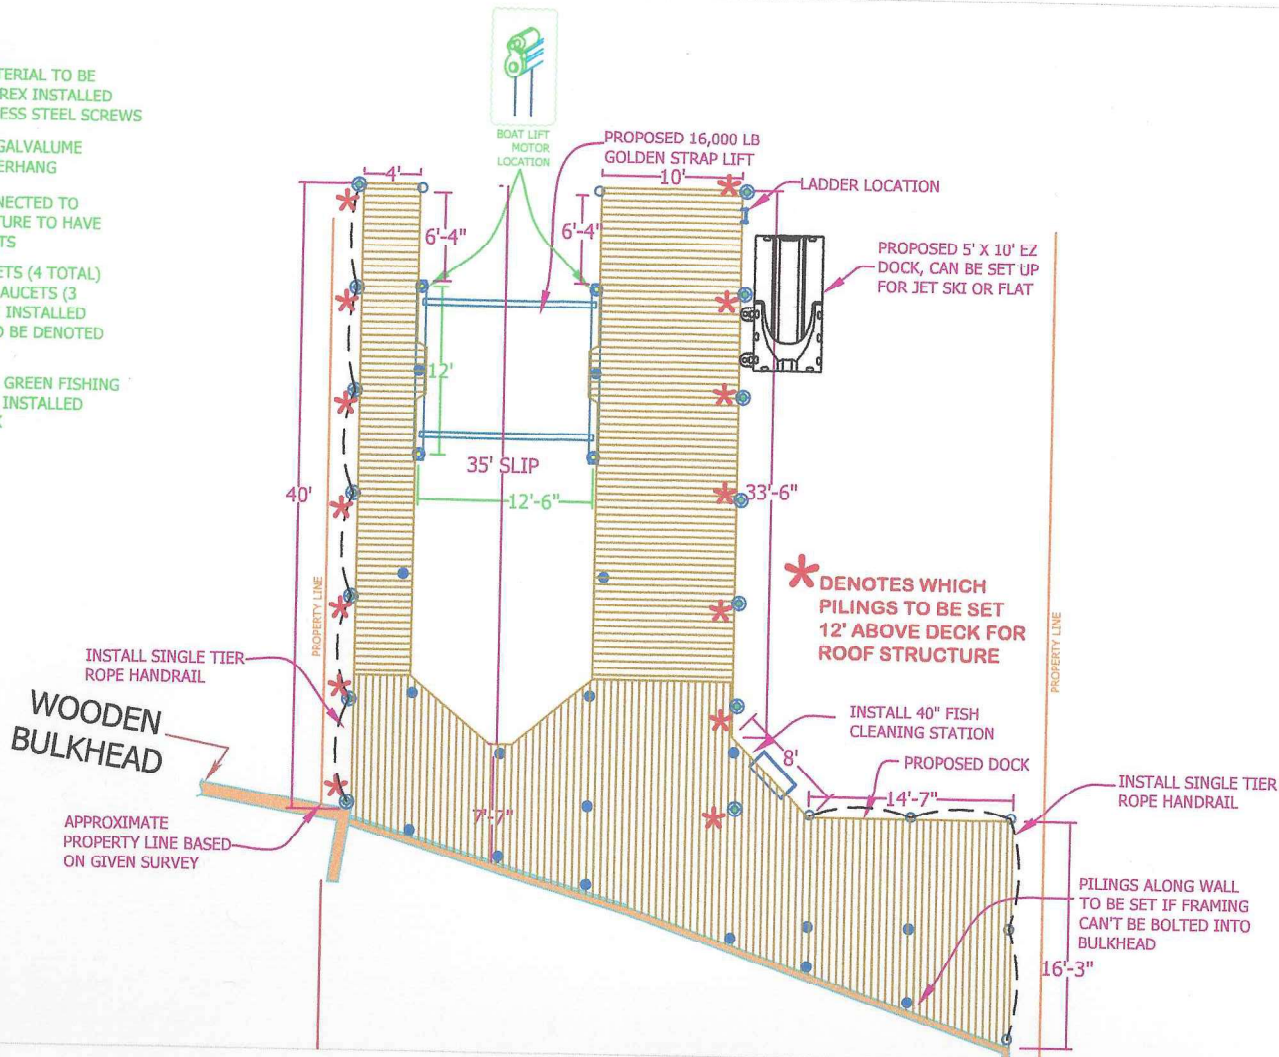

**SQUARE FOOTAGE**

EXISTING SQUARE FOOTAGE	<u>0</u>	OPTIONAL SQUARE FOOTAGE	<u>0</u>
PROPOSED SQUARE FOOTAGE	<u>1126</u>	TOTAL SQUARE FOOTAGE	<u>1126</u>

- LEGEND**
- 8" PILING - PILING HEIGHTS TO VARY
  - 10" PILING - PILING HEIGHTS TO VARY
  - 8" PILING - UNDER DECK
  - - - ROPE HANDRAIL

**ADDITIONAL INFORMATION**

- ALL PILINGS TO BE 2.5 CCA MARINE GRADE BUTT PILE
- ALL DECKING HARDWARE TO BE STAINLESS STEEL SCREWS
- ALL STRINGER TO BE .60 CCA/2"x8" R/S
- REQUIRED REFLECTORS TO BE INSTALLED
- BLACK PLASTIC PILING WRAP TO BE INSTALLED

APPROVAL OF PROPOSED BASE OPTION \_\_\_\_\_  
 APPROVAL DATE: \_\_\_\_\_

INITIAL OPTIONS SELECTED:  
 OPTION 1 \_\_\_\_\_ OPTION 2 \_\_\_\_\_

**\*\*ALL DIMENSIONS HEREIN AND ON SITE ARE APPROXIMATE +/-  
 \*\*DOCK TO BE BUILT LEVEL REGARDLESS OF VARYING ELEVATIONS OF**