


NOTE: IN ORDER TO PROMOTE DRAINAGE AWAY FOR THE STRUCTURE, THE SLAB ELEVATION SHOULD BE BUILT AT LEAST ONE FOOT ABOVE THE SURROUNDING GROUND AND THE GROUND SHOULD BE GRADED AWAY FROM THE STRUCTURE AT A SLOPE OF AT LEAST .5' FOR A DISTANCE OF 10' AND .1' FOR EACH 10' THEREAFTER TO CORNER OF LOT.

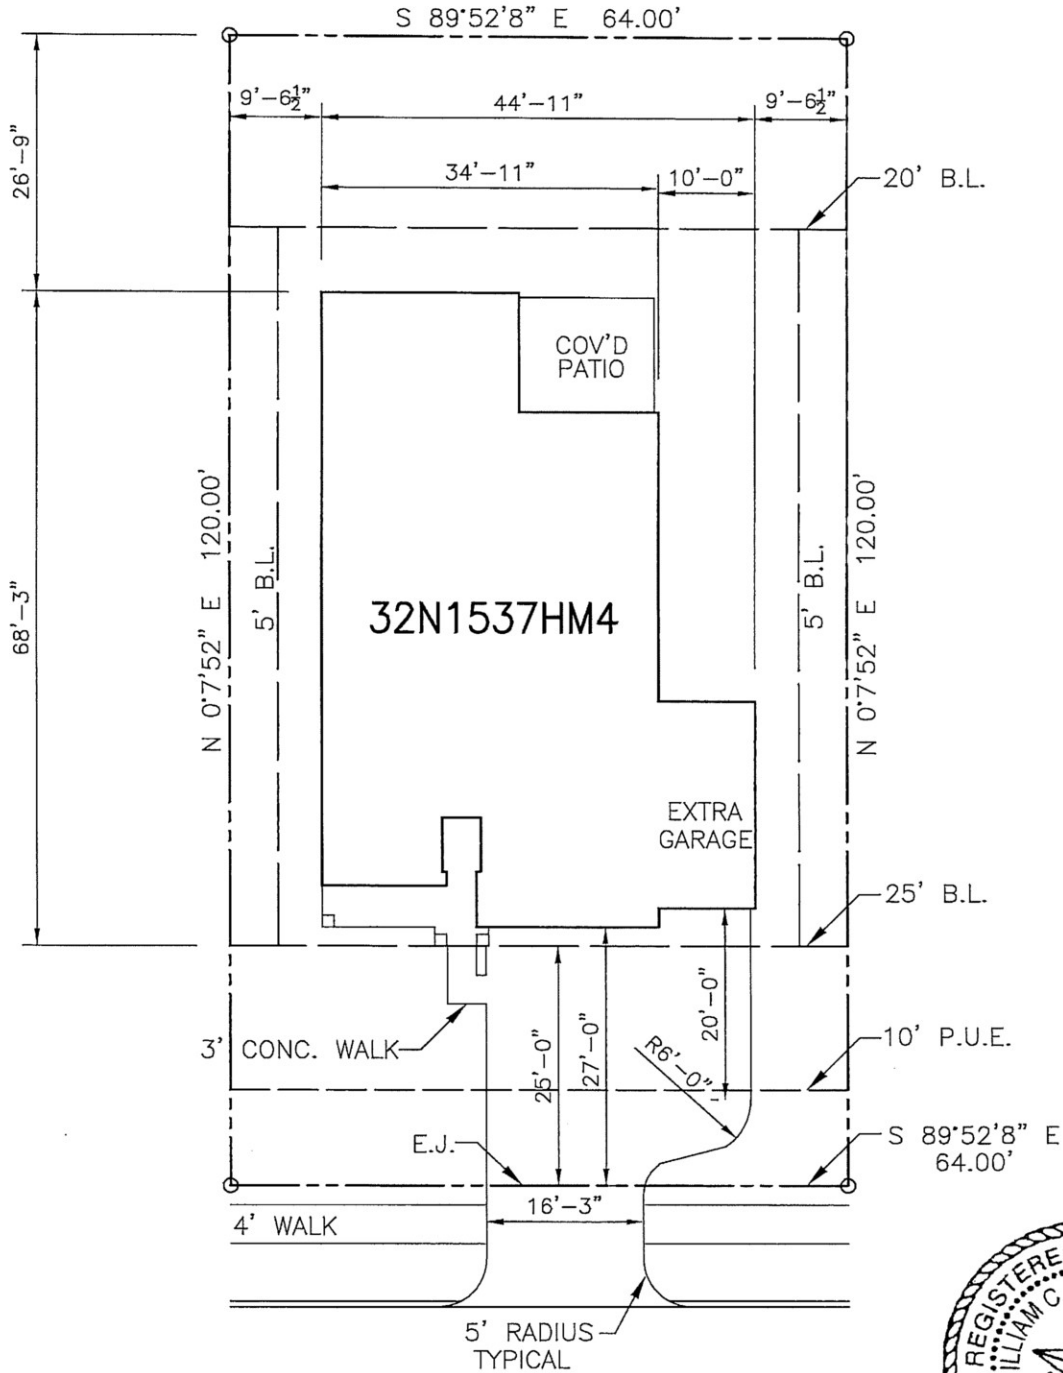

OCT 25 2019

322274			
REVISIONS			
DATE	SUB	INT	DESC
10.18.19	00	MB/AD	PLOT
11.7.19	01	NC/NVOL	

7709 BOGIE LANE

PAVED STREETS w/ CONC. CURB
SEWER APPROX. 3' BELOW GRADE

SCALE: 1" = 20'

FLATWORK		
DRIVEWAY	721	SQ. FT.
DRIVEWAY APPROACH	215	SQ. FT.
ENTRY SIDEWALK	21	SQ. FT.
CITY SIDEWALK	N/A	SQ. FT.
SOD		
FRONT/SIDES	2815	SQ. FT.
REAR	1967	SQ. FT.

PECAN LAKES
SECTION - PHASE 2
PLAN: 1537HMR4 ADDRESS: 7709 BOGIE LANE
LOT: 16 BLOCK: 8
NCB: N/A NAVASOTA, TX

